

SHARP

LQ121S1DG11

Color TFT-LCD Module
(FA/POS/Banking terminals)

Features

- 31 cm [12.1"] SVGA format
- Built-in long life CCFT backlight (50 000 h)
- Easy replaceable lamp (CCFT)
- High brightness (250 cd/m²)
- Wide viewing angle
(Horizontal: 140° Vertical: 110°)
- Power supply/voltage: 3.3 V/5.0 V


Specifications

Parameter		Unit
Display size	31 [12.1]	cm ["]
Dot format (H x V)	800 x RGB x 600	dot
Dot pitch (H x V)	0.1025 x 0.3075	mm
Active area (H x V)	246.0 x 184.5	mm
Color	262 144 (6-bit each color)	-
Input signal	Digital RGB	-
Viewing direction	6:00	-
Backlight type	2CCFT(E)	-

Parameter		Unit
Brightness	250	cd/m ²
Contrast ratio	300 : 1	-
Power consumption	7.5	W
Outline dimensions (W x H x D)	290.0 x 225.0 x 13.2	mm
Weight	830	g
Operating temperature	0 to +50	°C
Storage temperature	-25 to +60	°C

Outline Dimensions

unit : mm

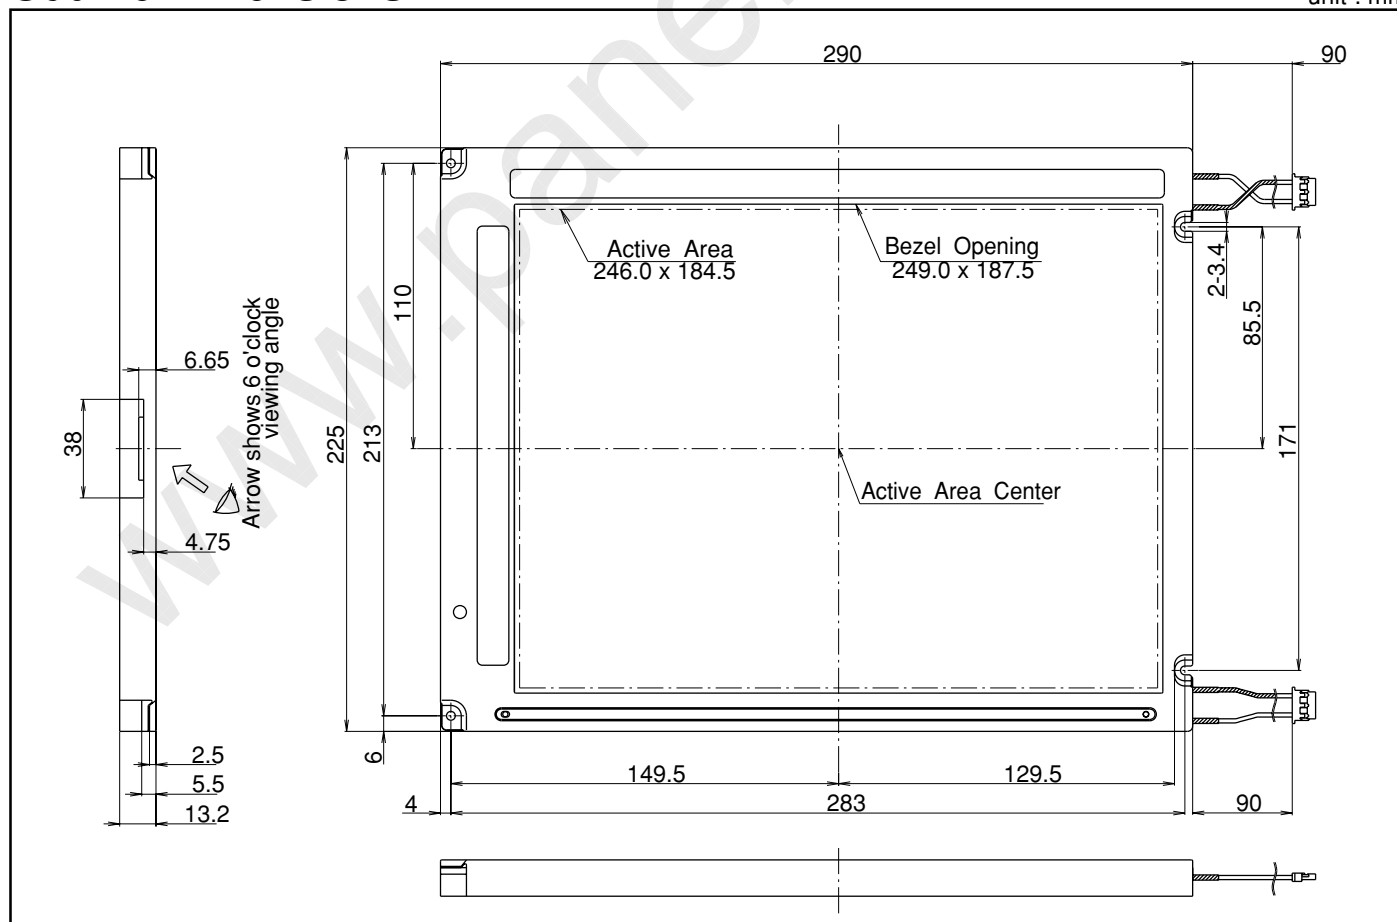

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. Specifications are subject to change without notice for improvement.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

www.panelook.com